


# UniFi® Access



# Access Rescue KeySwitch

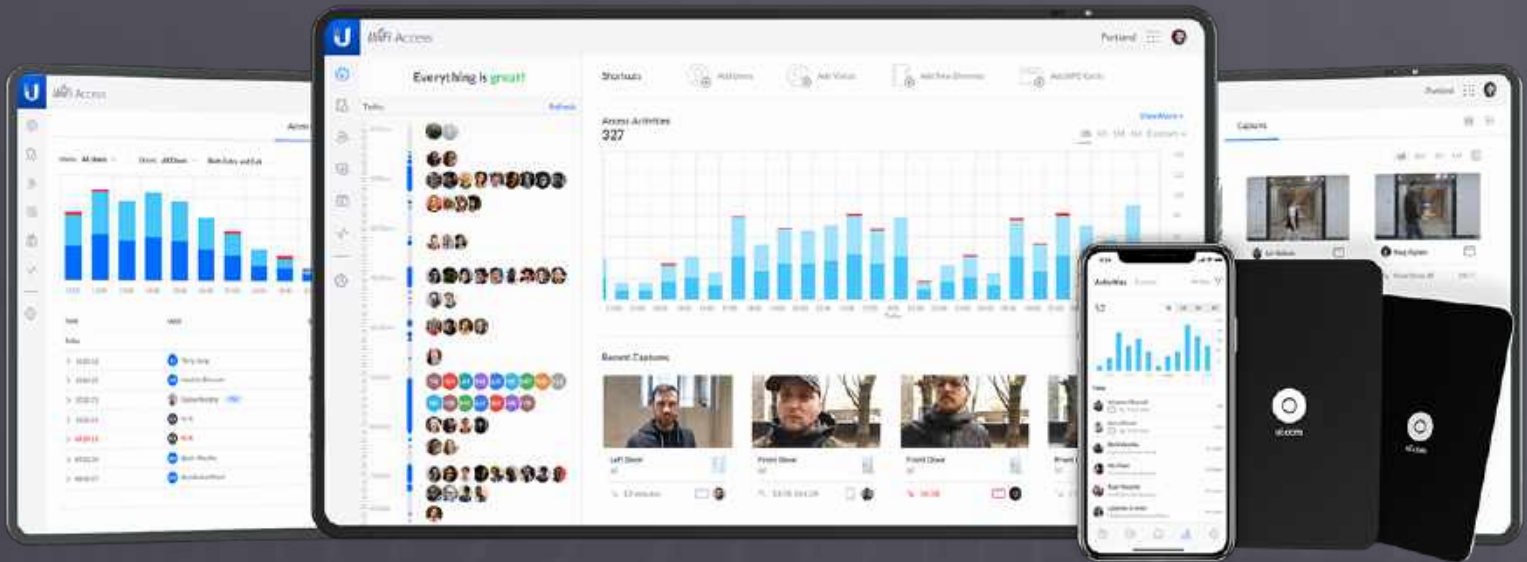

Emergency KeySwitch providing open door redundancy in the event of a system malfunction.

UniFi® Access Rescue KeySwitch is a single pole dual throw manual KeySwitch designed to work with the UniFi Access system. In the event of a system malfunction, the UA-Rescue KeySwitch allows for a user to manually unlock any door controlled by the UniFi Access Hub. Compatible with both Fail Safe and Fail Secure lock systems, the UniFi Access Rescue KeySwitch is an integral part of any robust Door Access solution.

## Mechanical

Dimensions	Ø60 x 74 mm (Ø2.4 x 2.9")
Weight	94 g (3.32 oz)
Enclosure material	Polycarbonate

## Hardware

Terminal block	COM/NO/NC 18-24 AWG
Key switch	Brass internal wave key, 28VDC, 4A
Operating temperature	-30 to 65° C (-22 to 149° F)
Storage temperature	-40 to 85° C (-40 to 185° F)
Operating humidity	5 - 95% noncondensing
Certifications	FCC, IC, CE



Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at [www.ui.com/support/warranty](http://www.ui.com/support/warranty)

©2021 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, UniFi, and UniFi Access are trademarks or registered trademarks of Ubiquiti Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.