

FUSION2GO ULTRA



SUPPORTS 5G, 4G & LTE SERVICES



COMPATIBLE WITH ALL US CARRIERS



MAX PERFORMANCE IN REMOTE AREAS

Most Powerful 5G/LTE Cell Phone Signal Booster for Car, Truck or SUV

Overview

Stay connected with better cell signal inside your car, truck, or SUV with Fusion2Go Ultra, the MOST POWERFUL in-vehicle cell phone signal booster from SureCall. Enjoy seamless 5G and 4G/LTE cellular connectivity for all phones and devices on all US carriers including Verizon, AT&T, and T-Mobile. Reliably make phone calls, send text messages, stream audio and video, and browse the web while traveling through the weakest signal areas.

Fusion2Go Ultra boosts signal simultaneously to and from all cellular phones and devices inside the vehicle. No programming or additional monthly fees required. Quickly optimize setup to maximize performance with the free 'SureCall' mobile app available in the Google Play or Apple's App Store.

- Boosts 5G and 4G LTE voice, text, and data speeds for all users inside any car, truck, or SUV
- Works with all US cell carriers, including Verizon, AT&T, T-Mobile, Straight Talk, US Cellular and more
- Supports multiple simultaneous devices, including hotspots, while extending their battery life
- INDUSTRY'S MOST POWERFUL signal booster delivers extended cellular range for maximum performance in remote areas
- Setup is a breeze with the 'SureCall' mobile app that helps determine best antenna placement for maximum performance
- Fewer dropped calls, improved call clarity, stronger connectivity, faster downloads, and a better streaming experience even at the very edge of the network
- Designed, assembled, and tested in the USA. Includes lifetime 100% US-based tech support and industry leading 3-year warranty

Kit contents

Fusion2Go Ultra booster, exterior magnet-mount antenna, interior patch antenna, 12V DC power supply, and quick install guide. Fusion2Go Ultra is also compatible with AC power adapter cable for added versatility – part # SC-AC-59V28A-B.



The highest uplink power on the market helps you stay connected with distant cell towers.


Key Specifications

| | |
|----------------------------------|---|
| Uplink Frequency Ranges (MHz): | 698-716 / 776-787 / 824-849 / 1710-1755 / 1850-1915 |
| Downlink Frequency Ranges (MHz): | 728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155 |
| Supported Standards: | 5G, 4G, LTE cellular standards |
| Max Gain: | 50 dB |
| Gain Adjustment: | 20 dB (Automatic) |
| Max Uplink Power: | 30 dBm |
| Power Consumption: | ≤15W |
| VSWR: | ≤ 2.0 |
| RF Connectors: | FME Male (both ends) |


► Patent No. US 8,867,572 B1; US 9,100,839 B2




Magnetic-Mount Antenna



Signal Booster



Multi-Device Inside Antenna




DC Power Adapter



48346 Milmont Dr.
Fremont, CA 94538
www.SureCall.com

info@surecall.com
888-365-6283






FUSION2GO ULTRA

Most Powerful 5G/LTE Cell Phone Signal Booster for Car, Truck or SUV

Specifications

| | |
|---------------------------|---|
| Uplink Frequency (MHz): | 698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755 |
| Downlink Frequency (MHz): | 728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155 |
| Cellular Bands: | 12 / 17 / 13 / 5 / 26 / 2 / 25 / 4 |
| Supported Standards | 5G, 4G, LTE cellular standards |
| Maximum Gain: | 50 dB |
| Input Impedance: | 50 Ω |
| Gain Adjustment: | 20 dB (Automatic) |
| Maximum Uplink Power: | 30 dBm |
| DC Power: | 9-15V |
| VWSR: | ≤ 2.0 |
| RF Connectors: | FME Male (both ends) |
| Power Consumption: | $\leq 15W$ |
| Operation Temperature: | -4° to +158° F |
| Dimensions: | 8 x 4 x 1.4 inches |
| Weight: | 2.25 lbs |
| Certification: | FCC ID: RSN-F2GULTRA Contains FCC ID: 2ATPO-PB03 |
| | IC: 7784A-F2GULTRA Contains IC ID: 23236-PB03 |

Installation Example

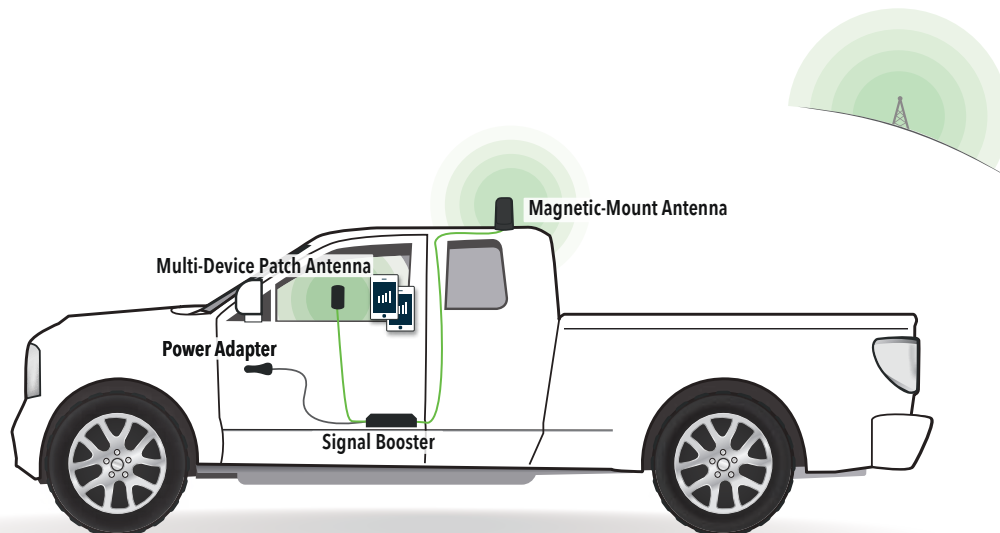

Quickly optimize your setup with the 'SureCall' mobile app that is available in the Google Play or Apple's App Store