

FUSION2GO XR



SUPPORTS 5G, 4G & LTE SERVICES



ALL NORTH AMERICAN CARRIERS



MAX PERFORMANCE IN REMOTE AREAS

High-Performance Cell Phone Signal Booster for Car, Truck or SUV

Overview

Boost 5G and 4G LTE cell signals inside your vehicle and enjoy maximum connectivity while traveling through challenging signal areas with the Fusion2Go XR cell phone signal booster from SureCall. The SUPERCHARGED Fusion2Go XR booster features the highest transmit power with UPGRADED magnet-mount rooftop antenna and interior antenna to help keep you connected to distant cell towers. Reliably make calls, text, email, stream videos and music and browse the web in remote areas – even at the very edge of the network.

The high-performance booster system improves cellular signals for multiple devices inside any car, truck, van, or SUV. Fusion2Go XR boosts voice, text, and data speeds on all 5G and 4G phones for all US carriers including Verizon, AT&T, T-Mobile, Straight Talk, US Cellular and more. Enjoy more consistent signal and extended range in weak signal areas for faster downloads, longer battery life, and easier streaming on all cell phones and cellular enabled devices.


- Boosts 5G and 4G LTE voice, text, and data speeds for all users inside any car, truck, or SUV
- Works with all US cell carriers, including Verizon, AT&T, T-Mobile, Straight Talk, US Cellular and more
- Supports multiple simultaneous devices, including hotspots, while extending their battery life
- SUPERCHARGED signal booster with upgraded exterior and interior antennas that deliver maximum performance for Extended Range while traveling in remote areas
- Maintains cellular connectivity in the weakest signal areas for fewer dropped calls, improved call clarity, and faster data speeds for a more reliable audio and video streaming experience
- Durable, weather-tested components are made to last and protected from water, dust, and road grime
- Designed, assembled, and tested in the USA. Includes lifetime 100% US-based tech support and industry leading 3-year warranty

Kit contents


High-performance Fusion2Go XR booster, exterior magnet-mount antenna, interior patch antenna, 12V DC power supply, and install guide. Fusion2Go XR is also compatible with AC power adapter cable for added versatility – part # SC-AC-59V28A-B.



Magnetic-Mount Antenna



Signal Booster



Multi-Device Inside Antenna



DC Power Adapter



Extended Range for Maximum Performance in Remote Areas

Key Specifications

Uplink Frequency Ranges (MHz):	698-716 / 776-787 / 824-849 / 1710-1755 / 1850-1915
Downlink Frequency Ranges (MHz):	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	5G, 4G, LTE cellular standards
Max Gain:	50 dB
Gain Adjustment:	20 dB (Automatic)
Max Uplink Power:	29.0 dBm
Power Consumption:	≤12W
VSWR:	≤ 2.0
RF Connectors:	FME Male (both ends)


► Patent No. US 8,867,572 B1; US 9,100,839 B2



48346 Milmont Dr.
Fremont, CA 94538
www.SureCall.com

info@surecall.com
888-365-6283






FUSION2GO XR

High-Performance Cell Phone Signal Booster
for Car, Truck or SUV

Specifications

Uplink Frequency (MHz)	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
Downlink Frequency (MHz):	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	5G, 4G, LTE cellular standards
Maximum Gain:	50 dB
Input Impedance:	50 Ω
Gain Adjustment:	20 dB (Automatic)
Maximum Uplink Power:	29.0 dBm
DC Power:	6-15V
VWSR:	≤ 2.0
Exterior Cable:	LMR100 / 12.5 ft
RF Connectors:	FME Male (both ends)
Power Consumption:	$\leq 12W$
Operation Temperature:	-4° to +158° F
Dimensions:	5.625 x 4 x 1.125 inches
Weight:	1.43 lbs
Certification:	RSN-FUSION2GO5G (Fusion2Go 5G) Contains FCC ID: XPYNINAB1

Installation Example

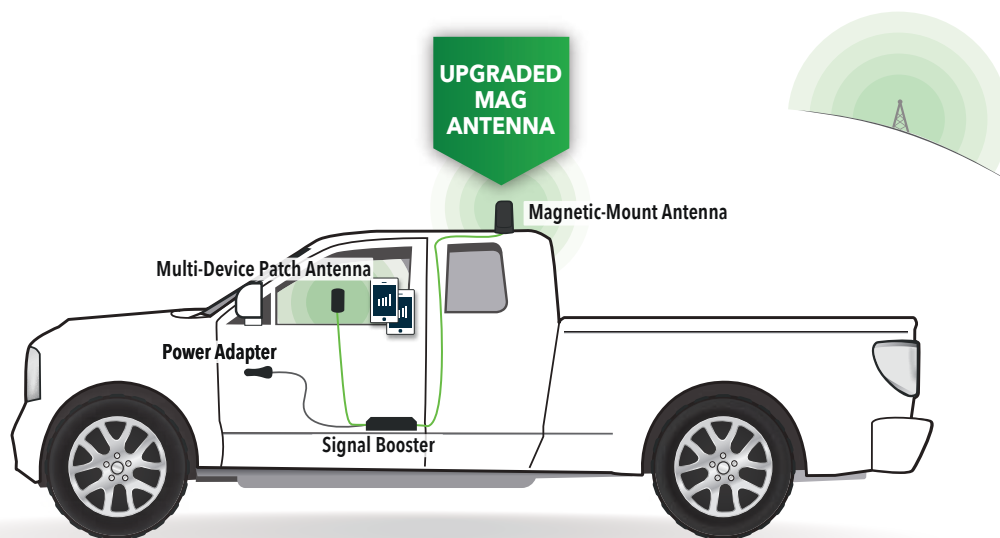

Quickly optimize your antenna separation with the 'SureCall' mobile app that is available in the Google Play or Apple's App Store